


DuPont™ FlexWrap™ EZ

Versatile Self-Adhered Flashing for Non-Flanged Objects

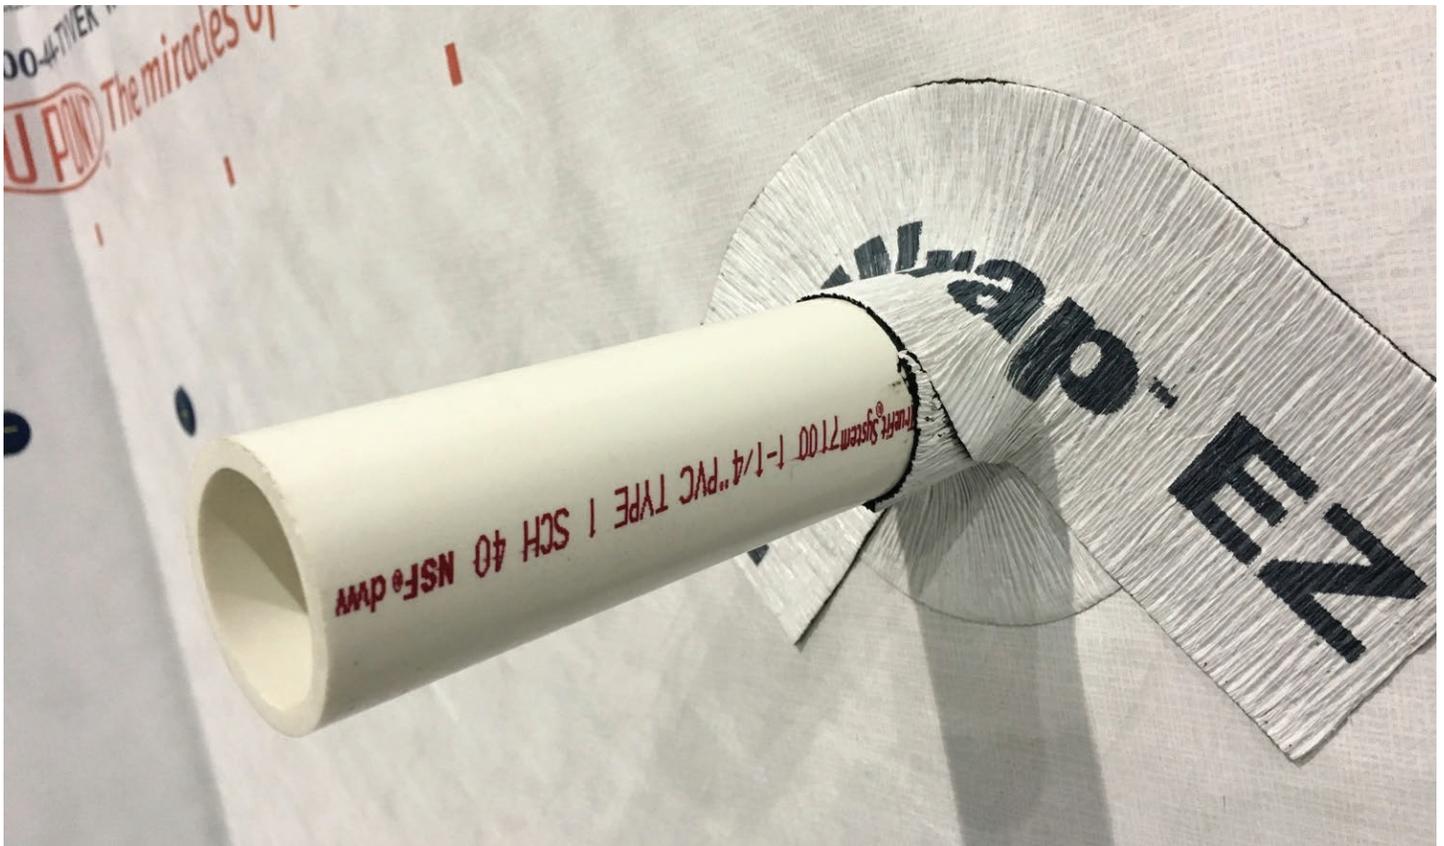

FEATURES/BENEFITS

Description

DuPont™ FlexWrap™ EZ is a flexible, extendable self-adhered tape with a 100% butyl-based adhesive layer that creates an air and water-tight seal around penetrations of all different shapes and sizes. FlexWrap™ EZ provides an option for home builders, trade contractors and remodelers to easily seal around non-flanged objects that penetrate the building envelope.

Suitable for both residential and commercial applications, FlexWrap™ EZ is ideal for flashing around many smaller wall protrusions like plumbing and HVAC components, vents, wires, exterior electrical outlets, exterior lights, exhaust fans, dryer vents, hose bibs, gas lines and more – a fast and easy solution to help improve energy efficiency and the durability of a wall system.

Complete System

FlexWrap™ EZ is a part of a complete DuPont™ Tyvek® Building Envelope Solution that helps to improve the energy efficiency and durability of buildings.

Ease of Use

FlexWrap™ EZ is easy to handle and install. Some features and benefits include:

- Flexibility – easy to install around penetrations of all shapes and sizes
- Versatility – adheres to most common building materials
- Durability – 100% butyl adhesive performs through temperatures as low as -4°C (25°F) to create a lasting airtight seal
- Efficiency – just one roll completely covers and improves the energy efficiency of an average-sized home
- Simple installation with 2-piece, heavy-duty, scored release paper
- Withstands up to nine (9) months (270 days) of UV exposure
- Does not contain asphaltic/bitumen adhesive materials prohibited by many window manufacturers due to adverse material reactions

Available Sizes

FlexWrap™ EZ is packaged in ready-to-use 2 3/4" wide x 15' long rolls.

PROPERTIES

DuPont™ FlexWrap™ EZ exhibits physical properties as indicated in Table 1 when tested as represented. Review all instructions and (Material) Safety Data Sheet ((M)SDS) before use. Please contact DuPont at 1-800-448-9835 when additional guidance is required for writing specifications that include this product.

TABLE 1: Performance Testing for FlexWrap™ EZ

Test Method	Property	Property
ASTM E-331 ASTM E-331 after thermal aging (0-120°F)	Installed System Water Intrusion Testing	NO leakage at 300 Pa NO leakage at 300 Pa
ASTM E-96	Water Vapor Permeability	< 1 perm (< 60 ng/Pa.sec.m ²)
-	Application Temperature	Best when installed above 25°F*
AAMA 711-13	Material Standard for Self-Adhering Flashing Surrounding Exterior Wall Fenestration	Class A (no primer) Level 3 Thermal Exposure (80°C/176°F for 7 days)

* Consult DuPont for primer recommendations



**For more information visit us at
building.dupont.com
or call 1-800-448-9835**

NOTICE: No freedom from any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries or regions. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR ANY APPLICABLE WRITTEN WARRANTIES SPECIFICALLY PROVIDED BY DUPONT. ALL IMPLIED WARRANTIES INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. The buyer assumes all risks as to the use of the material. Buyer's exclusive remedy or any claim (including without limitations, negligence, strict liability, or tort) shall be limited to the refund of the purchase price of the material. Failure to strictly adhere to any recommended procedures shall release DuPont Specialty Products USA, LLC or its affiliates, of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business.