

Joint Closure Recommendations Used in Metal Building Applications

To maximize the efficiency of DuPont™ Thermax™ polyisocyanurate insulation in metal buildings and alternative applications such as tilt-up concrete wall panels and parking garage ceilings, joints between boards must be properly finished. Whether on the interior or exterior, finished joints reduce air leakage and moisture infiltration. They also create a clean, professional appearance in interior applications.

Several joint closure systems are recommended by DuPont when using any of the Thermax™ product family:

- DuPont™ Thermax™ Sheathing
- DuPont™ Thermax™ Metal Building Board
- DuPont™ Thermax™ Heavy Duty
- DuPont™ Thermax™ Heavy Duty Plus*
- DuPont™ Thermax™ Light Duty
- DuPont™ Thermax™ White Finish.

All accessories are available for sale in conjunction with insulation products. See specific Thermax™ product installation guidelines for board attachment procedures.

Closure System Components

Each joint closure system uses one or more of the following components:

- Thermax™ white foil tape (for Thermax™ Heavy Duty, Thermax™ Heavy Duty Plus, Thermax™ Light Duty or Thermax™ White Finish)
- Thermax™ aluminum foil tape (for Thermax™ Sheathing and Thermax™ Metal Building Board)
- Clip Strip
- Interlocking System
- J-Channel
- Weathermate™ Straight Flashing
- Construction-grade sealant and adhesive**
- Shiplap board joint

Closing a Thermax™ Joint

OPTION 1

Requires square edge boards

1. Center Thermax™ white foil tape over dry, clean edge joint and apply tape (Figure 1). When installing Thermax™ Sheathing or Thermax™ Metal Building Board, use aluminum foil tape.
2. Use a squeegee or stiff bristle brush to press the tape firmly to the joint. Cut tape with a knife. Do not tear tape.


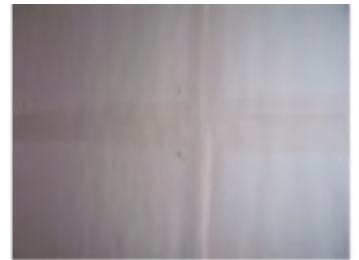








Figure 1.



Interior Air Sealing with Tape



Joint Closures from DuPont

	Joint Closure	Description	Sizes	Package Details
	<p>DuPont™ Thermax™ White Foil Tape or Thermax™ Aluminum Foil Tape</p>	<p>Strong and durable foil tapes help prevent air and water vapor infiltration at joints and seams</p>	<p>3" wide</p>	<p>150' rolls (16 rolls/box)</p>
	<p>Clip Strip</p>	<p>PVC closure effectively and efficiently joins two edges of Thermax™ Insulation boards</p>	<p>Accommodates foam thicknesses of 1", 1.5", 2", 2.5", 2.65", 3" and 3.2"</p>	<p>10' lengths; sold in cartons of 20 (200 linear feet)</p>
	<p>Interlocking System</p>	<ul style="list-style-type: none"> • Two-part PVC closure • Sections easily snap into place for a secure fit • Base sections fasten to concrete or masonry walls or ceilings 	<p>Base 1" section accommodates foam thicknesses from 1" to 1.75" 2" section accommodates foam thicknesses from 2" to 3.2" Top "T" section 1", 1.5", 2", 2.5", 3" and 3.2"</p>	<p>10' lengths; sold in cartons of 20 (200 linear feet)</p>
	<p>J-Channel</p>	<ul style="list-style-type: none"> • PVC closure • Typically used when other closure methods will not cover the joints between boards (such as the joint between the top and bottom of Thermax™ Insulation or at the roof peak when combining two sections of board) 	<p>Accommodates foam thicknesses of 1", 1.5", 2", 2.5", 2.65", 3" and 3.2"</p>	<p>10' lengths; sold in cartons of 20 (200 linear feet)</p>
	<p>DuPont™ Weathermate™ Straight Flashing <i>For use on Thermax™ Insulation that is applied on the exterior side of back-up wall only, e.g. Thermax™ installed outboard of a Steel Stud Framed Wall</i></p>	<ul style="list-style-type: none"> • High-density polyethylene film facer with butyl rubber adhesive • Resists water intrusion at joints between insulation boards in standing seam metal roofs and steel stud construction 	<p>4" and 6" widths</p>	<p>100' rolls (6 rolls/box)</p>
 <p>Caulk Pocket</p>	<p>Shiplap Board Joint</p>	<p>One of the most thermally efficient joints available</p>	<p>N/A – edge treatment available on many rigid foam insulation products $\geq 1.5"$ thick</p>	<p>Varies</p>

*Parking garage ceilings are a specialized application requiring additional design considerations. For assistance installing Thermax™ products in this application, call 1-866-583-2583.

** Thermax™ Heavy Duty Plus Insulation is designed for use in walls only.

† To produce a continuous air- and moisture-resistant seal, use Vulkem 116, Sikaflex 201, Dow Corning 790 or equivalent sealant. Your DuPont representative can recommend an appropriate sealant and adhesive for your application.

Option 2

For exterior applications (steel stud walls and standing seam metal roofs).

1. Measure and cut **DuPont™ Weathermate™ Straight Flashing** (4" or 6" width) to cover full length of insulation boards. (Flashing is applied on the exterior of steel stud walls and exterior/top edge of standing seam metal roofs.)
2. Peel back part of release liner and center flashing over dry, clean edge joint.
3. Remove release liner while pressing flashing firmly along the joint. (Figure 2)

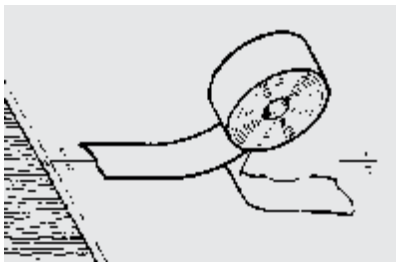


Figure 2.

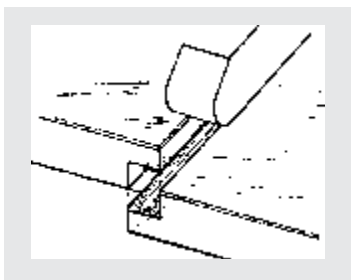


DuPont™ Thermax™ Insulation with Weathermate™ Flashing Applied

Option 3

Requires shiplap edge boards

1. Apply **Great Stuff Pro™ Gaps & Cracks Polyurethane Foam Sealant*** or a compatible construction grade sealant to shiplap edge, following manufacturer instructions.
2. Fit next **Thermax™** board firmly into the sealant-lined shiplap edge and fasten. (Figure 3)
3. Center **Thermax™** tape over dry, clean edge joint and apply tape.
4. Use a squeegee or stiff bristle brush to press the tape firmly to the joint. Cut tape with a knife. Do not tear tape.



Shiplap Edge Treatment

OPTION 4

Requires square edge boards

1. Fasten **Clip Strip** to wall or ceiling through holes provided at 12" o.c. with pneumatic nailer or equivalent.
2. Adjust **Clip Strip** to insulation board to allow for correct width. Align each PVC section 1/8" from the insulation board mark and attach.
3. Apply a construction-grade sealant to the single long flange of the **Clip Strip**, following sealant manufacturer instructions.
4. Slide **Thermax™** insulation boards into place as shown. (Figure 4)

Note: High-humidity metal buildings may require two insulation layers for optimum moisture control. Visit building.dupont.com for installation recommendations for high-humidity applications (Form No. 179-04338).

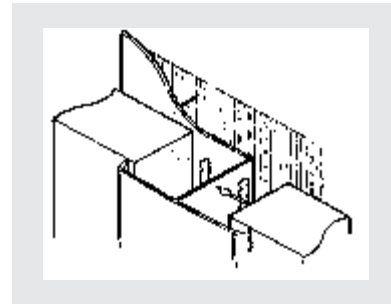
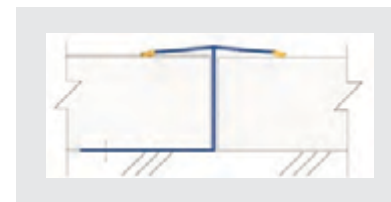


Figure 4



View from above – looking down wall



PVC attached to tilt-up wall

OPTION 5

For direct adhesion to concrete or masonry walls

1. Fasten base section of Interlocking System to concrete or masonry wall through holes provided at 12" o.c. with pneumatic nailer or equivalent.
2. Adjust base strip to insulation board to allow for correct width. Align each PVC section 1/8" from the insulation board mark and attach.
3. Apply beads of construction grade adhesive to the concrete centered 16" o.c. between the PVC strips.
4. Press board firmly into position between the PVC base strips and allow curing time, following adhesive manufacturer recommendation.
5. Apply a continuous bead of sealant along the face of the boards next to the joint.
6. Guide the top PVC section along insulation board edge until it snaps into the Interlocking System base. (Figure 5)

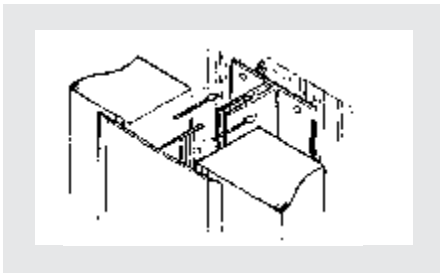
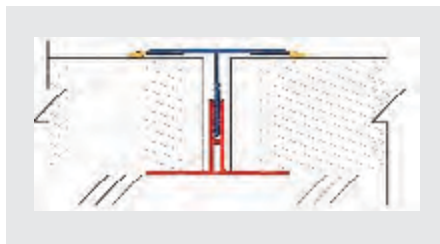


Figure 5



View from above – looking down wall

OPTION 6

1. Apply a compatible construction-grade sealant to inside of both J-Channel flanges, following sealant manufacturer instructions.
2. Fit closure around DuPont™ Thermax™ board edge. (Figure 6)

Note: With each system, it is important to also seal the wall-to-ceiling junction. For complete installation instructions, visit the literature library at building.dupont.com or call your DuPont representative.

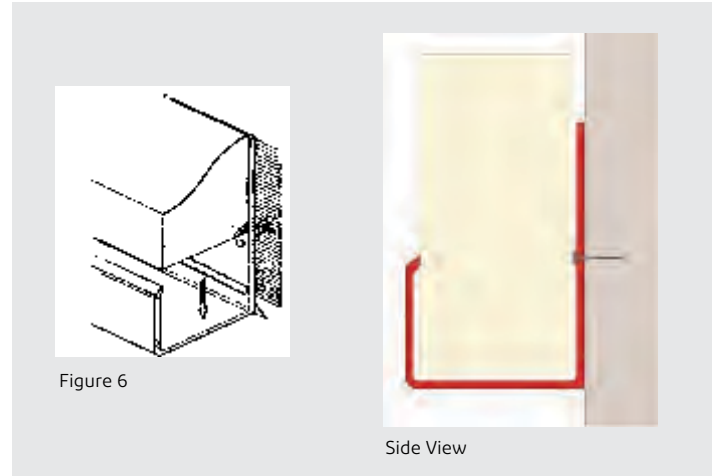



Figure 6

Side View



View from ground level – looking up wall



For more information visit
building.dupont.com
or call 1-866-583-2583

NOTICE: No freedom from infringement of any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. **NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.** The buyer assumes all risks as to the use of the material. Buyer's exclusive remedy or any claim (including without limitations, negligence, strict liability, or tort) shall be limited to the refund of the purchase price of the material. Failure to strictly adhere to any recommended procedures shall release DuPont of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business.

DuPont Polyisocyanurate Insulation

CAUTION: This product is combustible and shall only be used as specified by the local building code with respect to flame spread classification and to the use of a suitable thermal barrier. For more information, consult MSDS, call DuPont at 1-866-583-2583 or contact your local building inspector. In an emergency, call 1-989-636-4400.

DuPont Polyurethane Foam Insulation and Sealants

CAUTION: When cured, these products are combustible and will burn if exposed to open flame or sparks from high-energy sources. Do not expose to temperatures above 240°F (116°C). For more information, consult MSDS, call DuPont at 1-866-583-2583 or contact your local building inspector. In an emergency, call 1-989-636-4400 in the U.S. or 1-519-339-3711 in Canada.

Great Stuff Pro™ sealant and adhesive products contain isocyanate and a flammable blowing agent. Read the label and Material Safety Data Sheet carefully before use. Eliminate all sources of ignition before use. Wear long sleeves, gloves, and safety glasses or goggles. Provide adequate ventilation or wear proper respiratory protection. Contents under pressure.

Building and/or construction practices unrelated to building materials could greatly affect moisture and the potential for mold formation. No material supplier including Dow can give assurance that mold will not develop in any specific system.

WARNING: Rigid foam insulation does not constitute a working walkable surface or qualify as a fall protection product.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2019 DuPont.

43-D100752-enUS-1219 CDP