



## Product Data Sheet

### **AMBERSEP™ M4195 and AMBERSEP™ M4195 UPS Chelating Resins**

Industrial-grade Chelants for Copper, Nickel, and Cobalt Processing

#### **Description**

AMBERSEP™ M4195 and AMBERSEP™ M4195 UPS Chelating Resins exhibit an optimal selectivity for capturing transition metal ions (for example, copper and nickel) from solutions with pH less than 2, or in the presence of homogeneous chelating agents such as EDTA. The chemistry of these chelants is based upon a special multi-dentate amine ligand which is partially quaternized by sulfuric acid. When in this conjugate sulfuric acid salt form, the resin—fully swollen and hydrated—is ready for scavenging metals from acidic media.

Most metal process streams requiring separation and purification can typically be treated with standard iminodiacetic acid or aminophosphonic chelating resins. However, the more complex, challenging electrolytes require the higher selectivity of AMBERSEP™ M4195 or AMBERSEP™ M4195 UPS.

**AMBERSEP™ M4195 Chelating Resin**, with its screened particle size (through 20 U.S. Mesh, on 50 U.S. Mesh), is the standard grade of this product.

**AMBERSEP™ M4195 UPS Chelating Resin**, with its uniform particle size, provides enhanced performance for continuous ion exchange systems.

#### **Applications**

- Electroplating
- Microelectronic etching solutions
- Cobalt electrolyte purification
- Copper/nickel recovery from nickel laterite
- Copper/nickel recovery from raffinates

#### **Typical Properties**

##### **Physical Properties**

Copolymer	Styrene-divinylbenzene
Matrix	Macroporous
Type	Chelant
Functional Group	Bis-Picolylamine
Physical Form	Tan to dark brown to dark green, opaque, spherical beads

	<b>AMBERSEP™ M4195</b>	<b>AMBERSEP™ M4195 UPS</b>
<b>Chemical Properties</b>		
Ionic Form as Shipped	Weak base/Partial H <sub>2</sub> SO <sub>4</sub> salt	Weak base/Partial H <sub>2</sub> SO <sub>4</sub> salt
Copper Loading †	≥ 35 g/L	≥ 35 g/L
Water Retention Capacity	40 – 60%	40 – 60%
<b>Particle Size §</b>		
Particle Diameter	297 – 841 µm	~ 410 µm
< 300 µm	≤ 1%	
> 1180 µm	≤ 3%	
<b>Density</b>		
Shipping Weight	670 g/L	670 g/L

† 6 g Cu/L feed, pH 2

§ For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 177-01775).

## Application Information

Relative loading values of various metals for AMBERSEP™ M4195 and AMBERSEP™ M4195 UPS Chelating Resins are shown in Figure 1, and selected values of the same are shown in Table 1. The resin exhibits an extremely strong affinity for copper, even at low pH, whereas other metals have higher loading values at higher pH.

Complexed metals can be removed with strong acid (10N H<sub>2</sub>SO<sub>4</sub>) or ammonium hydroxide. Sometimes selective elution can be accomplished using varying strengths of acid.

Figure 1: Selectivity vs. pH

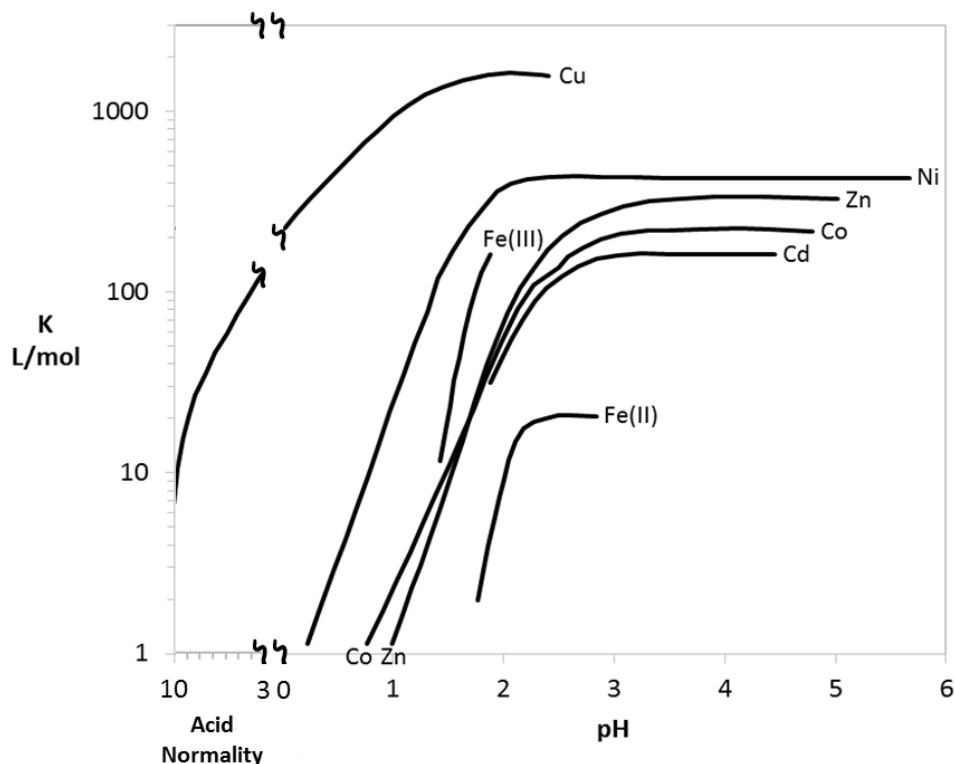


Table 1: Conditional absorption constants (K) for AMBERSEP™ M4195 and AMBERSEP™ M4195 UPS Chelating Resins

Metal Ion	pH	K (L/mol)
Cu <sup>2+</sup>	2.0	1280
Ni <sup>2+</sup>	2.0	375
U <sup>6+</sup>	2.0	190
Fe <sup>3+</sup>	2.0	181
Zn <sup>2+</sup>	2.0	82
	2.7	184
Co <sup>2+</sup>	2.0	51
	3.2	280
Cd <sup>2+</sup>	2.0	43
	2.8	196
Fe <sup>2+</sup>	2.3	23

## Product Stewardship

DuPont has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

DuPont strongly encourages its customers to review both their manufacturing processes and their applications of DuPont products from the standpoint of human health and environmental quality to ensure that DuPont products are not used in ways for which they are not intended or tested. DuPont personnel are available to answer your questions and to provide reasonable technical support. DuPont product literature, including safety data sheets, should be consulted prior to use of DuPont products. Current safety data sheets are available from DuPont.

Please be aware of the following:

- **WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Have a question? Contact us at:

[www.dupont.com/water/contact-us](http://www.dupont.com/water/contact-us)

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, ℠ or © are owned by affiliates of DuPont de Nemours Inc. unless otherwise noted. © 2019 DuPont.

